Use a Steering Wheel Puller to Avoid Horn Problems

Currently Applies To: ALL Models

Need to remove the steering wheel? Make sure you follow the removal procedure in the applicable S/M **to the letter**. That means using a commercially available steering wheel puller.

If you ignore that procedure and try muscling the steering wheel off the steering column shaft—or worse, tapping it loose with a hammer—you can bend the steering wheel, causing the horn not to work or to be so sensitive that it honks by itself. Steering wheels that are bent during R&R **aren't** covered by warranty.

If the horn has either problem, install a known-good steering wheel that was properly removed with a steering wheel puller. If the horn works fine with that known-good steering wheel, you need to replace the bent steering wheel.

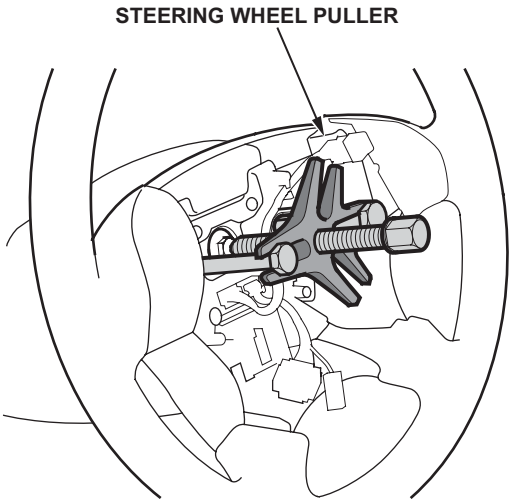

© 2007 American Honda Motor Co., Inc. – All Rights Reserved